

**EURO PRATIK**  
An Opus of Products



**Marbo**  
*Series*



*Stay Classy*

**ACRÒ GLASS**



*Handwritten signature*



# ACRŌ GLASS

2440mm x 1220mm



Euro Pratik is an innovative designer and importer of products, with an objective of creating world-class interior & exterior environment. At our core, we are design driven and we apply that creative thought process to both product development and internal operations.

From the house of Euro Pratik, comes to you **Acro Glass** !  
A ravishing collection of pure acrylic panels that mimics glass properties but are immensely strong and incredibly durable.

**Marbo**  
*Series*

COLLECTION 2024



Sublimely  
Divine



HIGH GLOSS FINISH



ECO FRIENDLY



LIGHT WEIGHT



SCRATCH RESISTANT



WATER RESISTANCE



HYGIENIC CLEANLINESS



PURE ACRYLIC



Recommended Euro Pratik Special Purpose Adhesive

# ACRŌ GLASS

2440mm x 1220mm



2.5mm

24550




2.5mm (±10%) THICKNESS



4550

Also Available in 1.5mm (±10%) THICKNESS

4312



4328





Timeless  
Luxury



HIGH GLOSS FINISH



ECO FRIENDLY



LIGHT WEIGHT



SCRATCH RESISTANT



WATER RESISTANCE



HYGIENIC CLEANLINESS



PURE ACRYLIC



Recommended Euro Pratik Special Purpose Adhesive

# ACR̄O GLASS

2440mm x 1220mm



2.5mm

24551



2.5mm (±10%) THICKNESS



4551

Also Available in 1.5mm (±10%) THICKNESS

4324



4435





The  
Grand  
Finesse



Recommended Euro Pratik  
Special Purpose Adhesive


# ACRÖ GLASS

2440mm x 1220mm



2.5mm

24527





2.5mm (±10%) THICKNESS



4527

Also Available in 1.5mm (±10%) THICKNESS

4327



4313



Artistic  
Panache



HIGH GLOSS FINISH



ECO FRIENDLY



LIGHT WEIGHT



SCRATCH RESISTANT



WATER RESISTANCE



HYGIENIC CLEANLINESS



PURE ACRYLIC



Recommended Euro Pratik Special Purpose Adhesive

# ACRŌ GLASS

2440mm x 1220mm



2.5mm

24531




2.5mm (±10%) THICKNESS



4531

Also Available in 1.5mm (±10%) THICKNESS

4334



4338



Stunningly  
Rustic



HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS

PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRŌ GLASS


2440mm x 1220mm



4552 1.5mm Thickness ( $\pm 10\%$ )



4342



4319





Innovative  
Creations



HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS


PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRŌ GLASS


2440mm x 1220mm

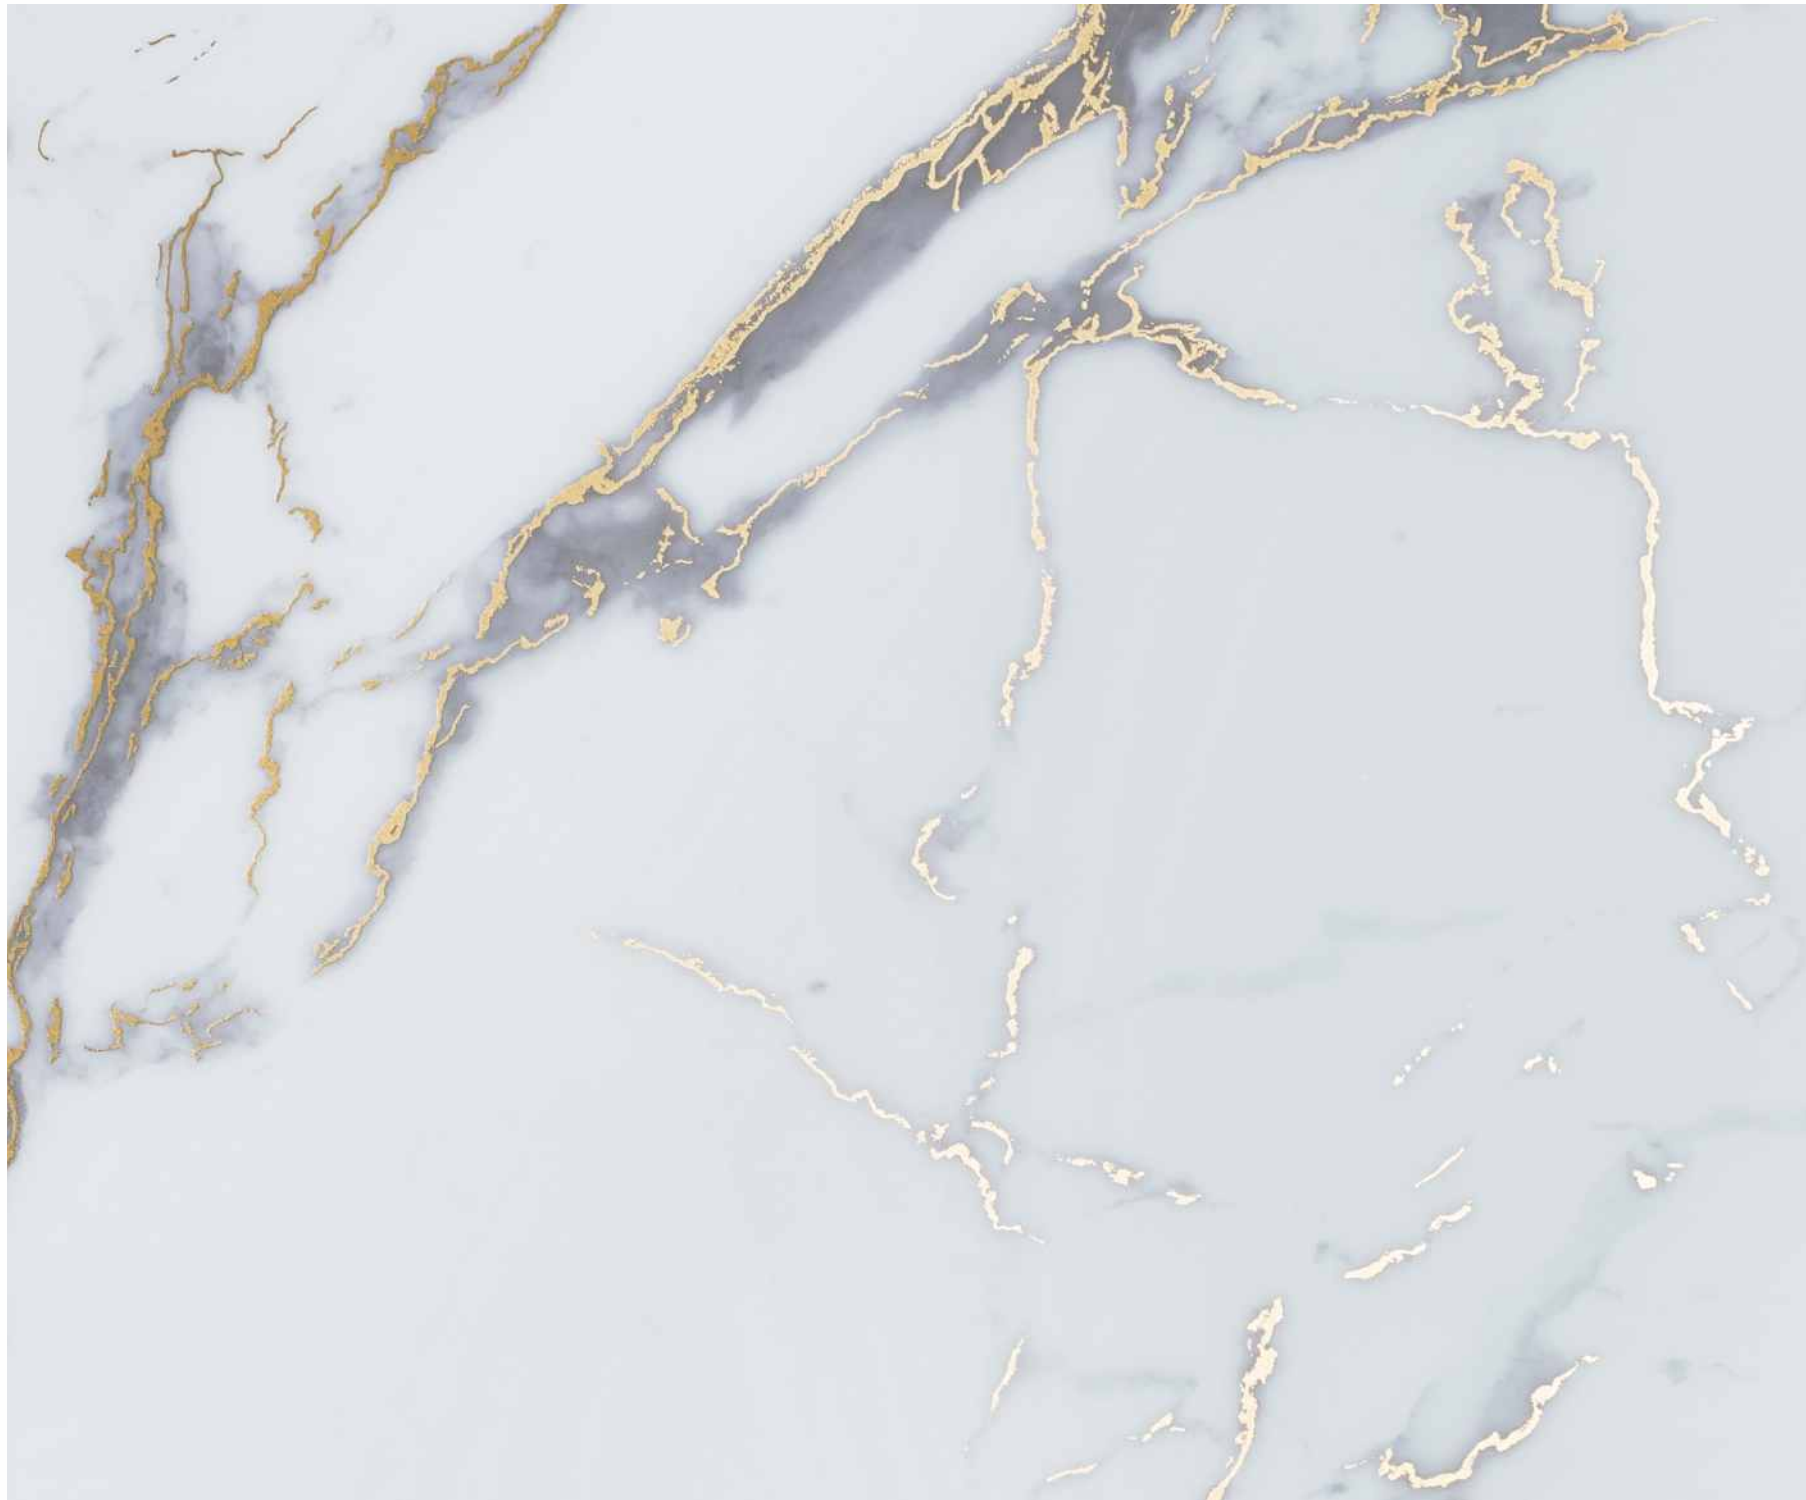

4553 1.5mm Thickness ( $\pm 10\%$ )



4336



4328






# Impressive Royalty



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRŌ GLASS


2440mm x 1220mm

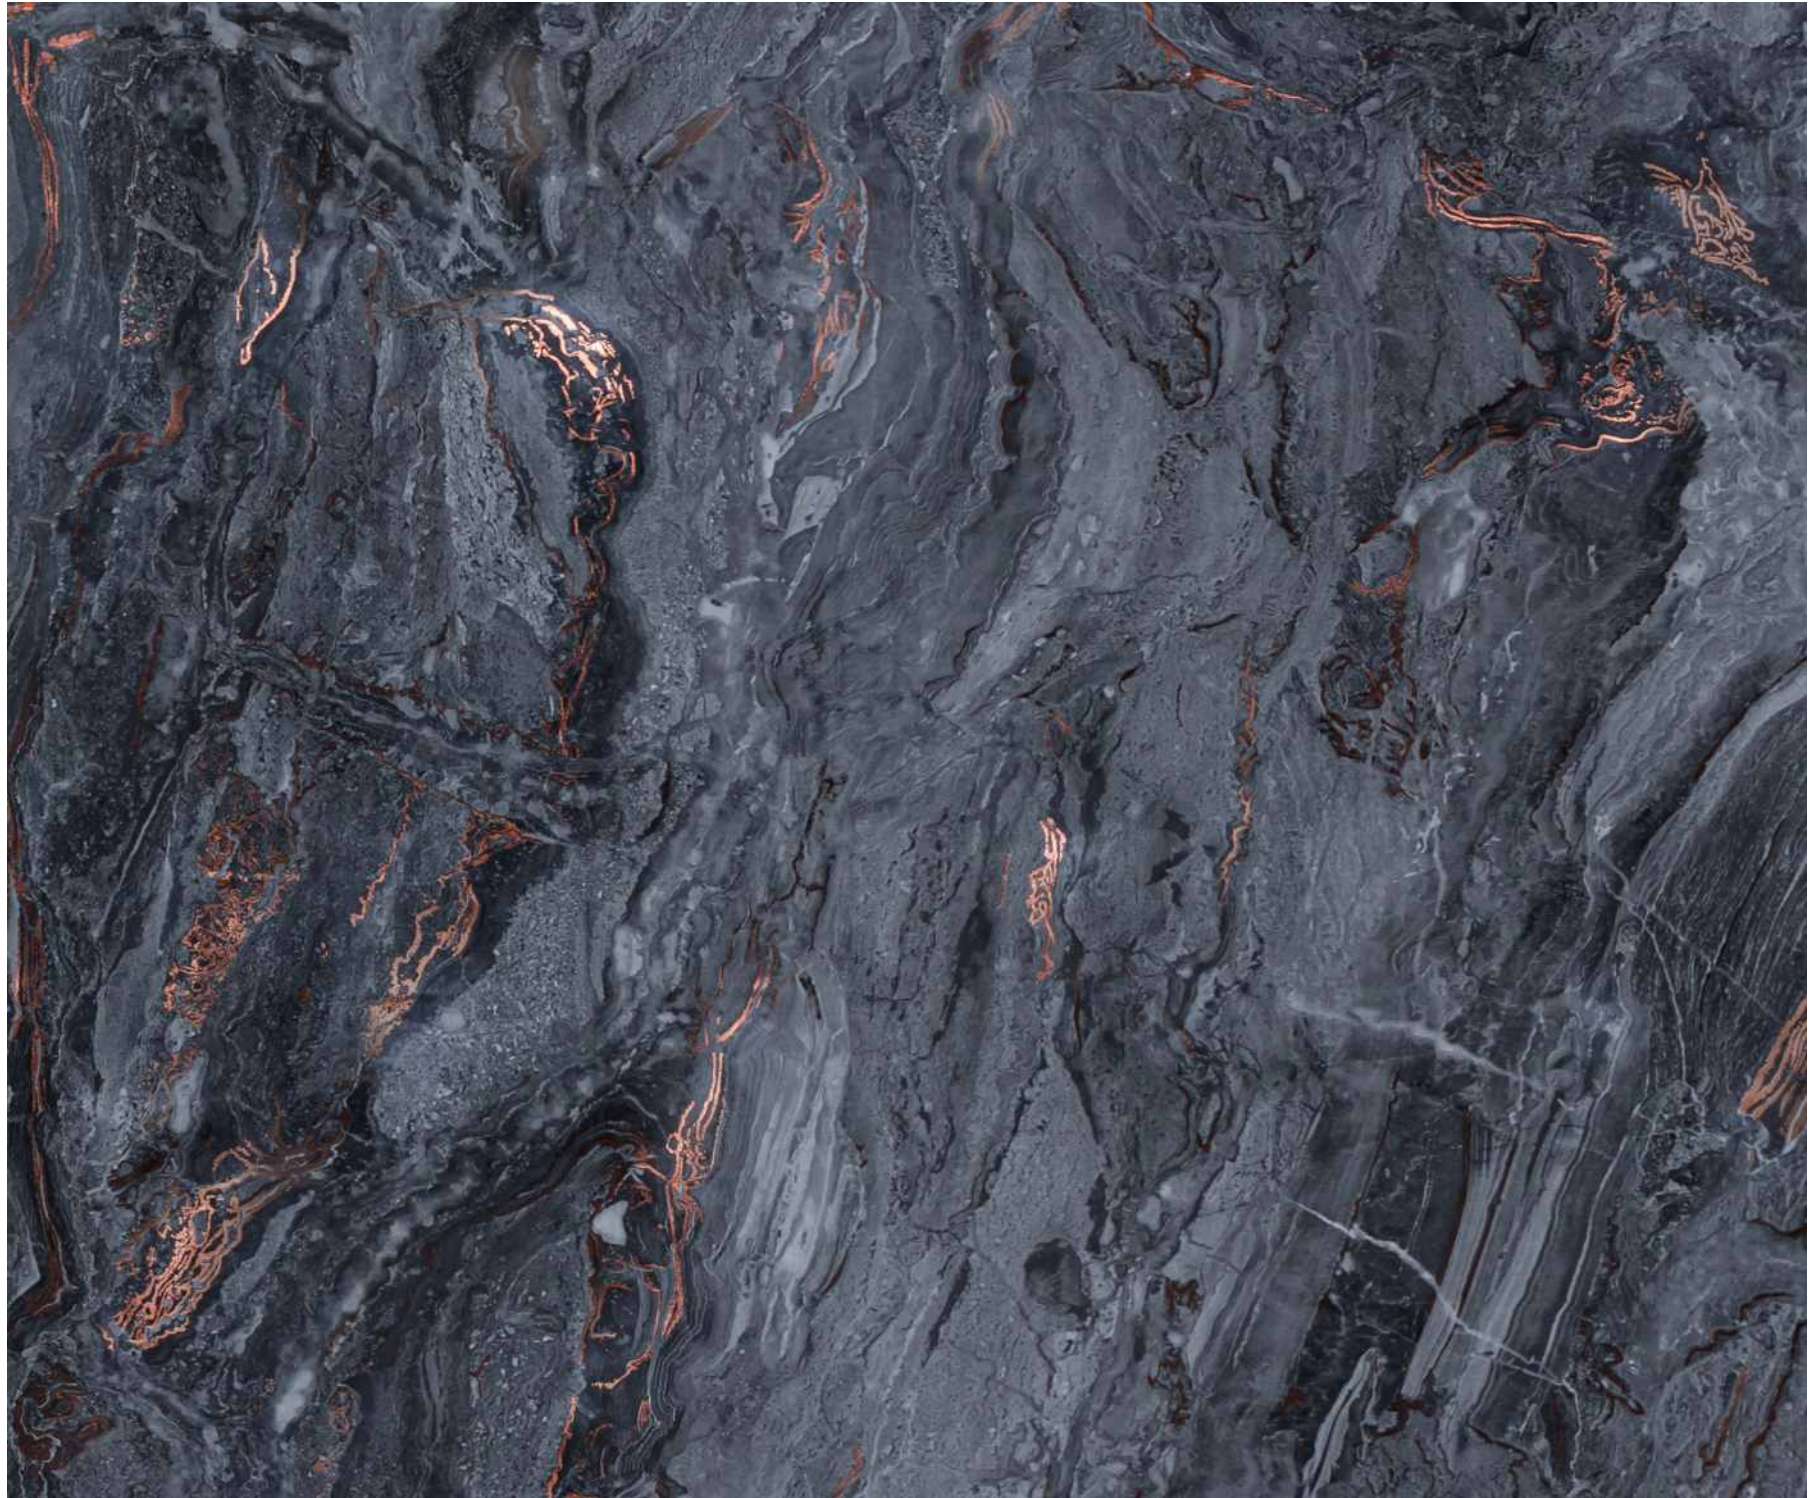

4554 1.5mm Thickness ( $\pm 10\%$ )



4327



4316





The  
Surreal  
Splendor



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRŌ GLASS

2440mm x 1220mm




4555 1.5mm Thickness ( $\pm 10\%$ )



4317



4341





Captivating  
Wonders



HIGH GLOSS FINISH



ECO FRIENDLY



LIGHT WEIGHT



SCRATCH RESISTANT



WATER RESISTANCE



HYGIENIC CLEANLINESS




PURE ACRYLIC



Recommended Euro Pratik Special Purpose Adhesive

# ACRÒ GLASS


2440mm x 1220mm

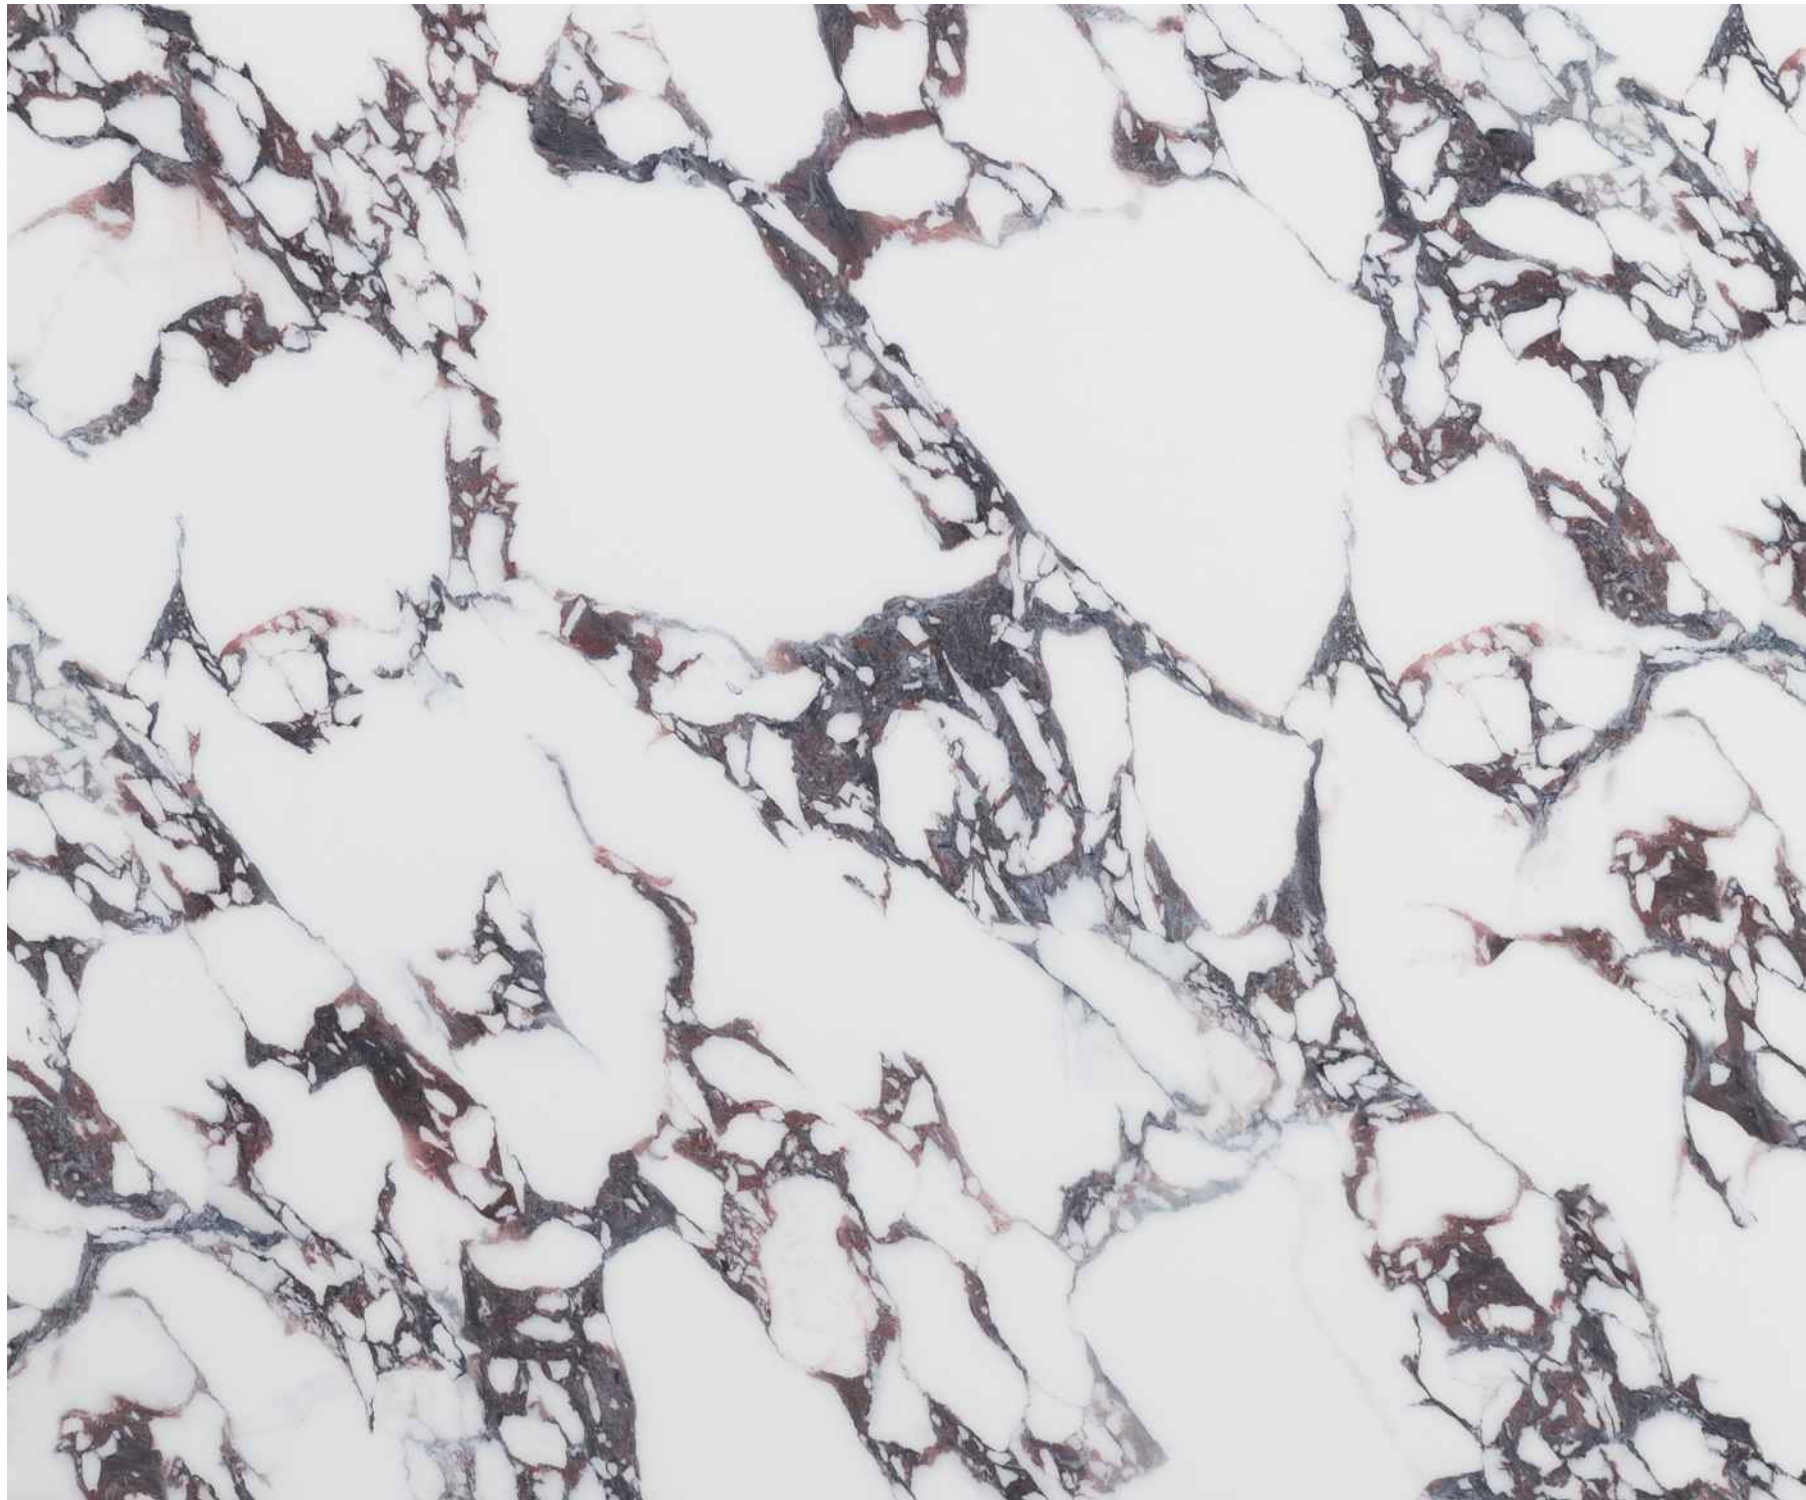


4556 1.5mm Thickness ( $\pm 10\%$ )



4314



4322





Vibes of  
Exuberance



HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS

PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRÖ GLASS


2440mm x 1220mm




4557 1.5mm Thickness ( $\pm 10\%$ )



4330



4313





The  
Primary  
Eloquence



HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS

PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRŌ GLASS


2440mm x 1220mm



4558 1.5mm Thickness ( $\pm 10\%$ )



4334



4328





Significant  
Splendor



HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS

PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRÒ GLASS


2440mm x 1220mm



4559 1.5mm Thickness ( $\pm 10\%$ )



4311



4329






4548 1.5mm Thickness ( $\pm 10\%$ )



4326



4331





HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS

PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRÖ GLASS


2440mm x 1220mm




4549 1.5mm Thickness ( $\pm 10\%$ )



4336



4330







4529 1.5mm Thickness ( $\pm 10\%$ )



4334



4319





HIGH GLOSS  
FINISH

ECO  
FRINDLY

LIGHT  
WEIGHT

SCRATCH  
RESISTANT

WATER  
RESISTANCE

HYGIENIC  
CLEANLINESS

PURE  
ACRYLIC



Recommended Euro Pratik  
Special Purpose Adhesive

# ACRÖ GLASS


2440mm x 1220mm



4530 1.5mm Thickness ( $\pm 10\%$ )



4312




4332





4525

1.5mm Thickness ( $\pm 10\%$ )

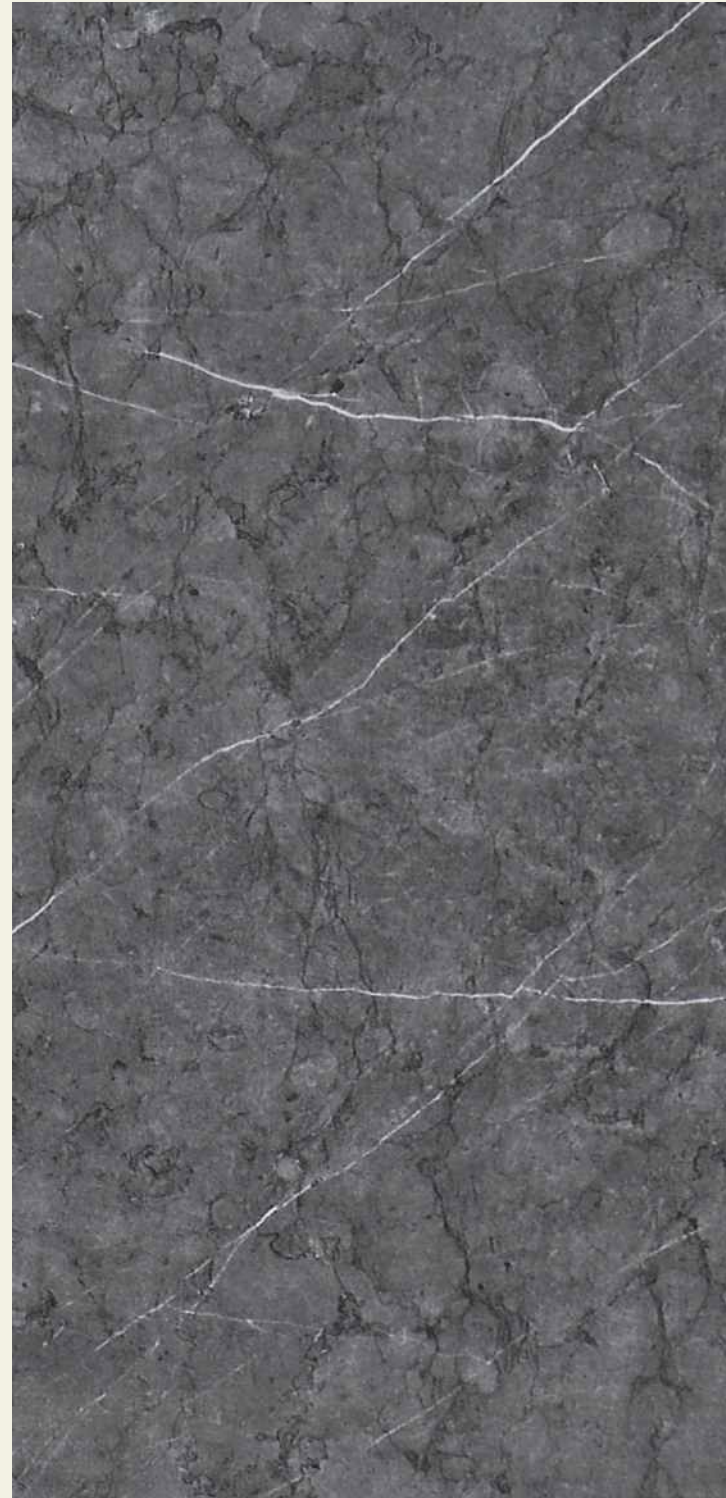


4526

1.5mm Thickness ( $\pm 10\%$ )

4324



4323





HIGH GLOSS FINISH



ECO FRIENDLY



LIGHT WEIGHT



SCRATCH RESISTANT



WATER RESISTANCE



HYGIENIC CLEANLINESS




PURE ACRYLIC



Recommended Euro Pratik Special Purpose Adhesive

# ACRÒ GLASS

2440mm x 1220mm

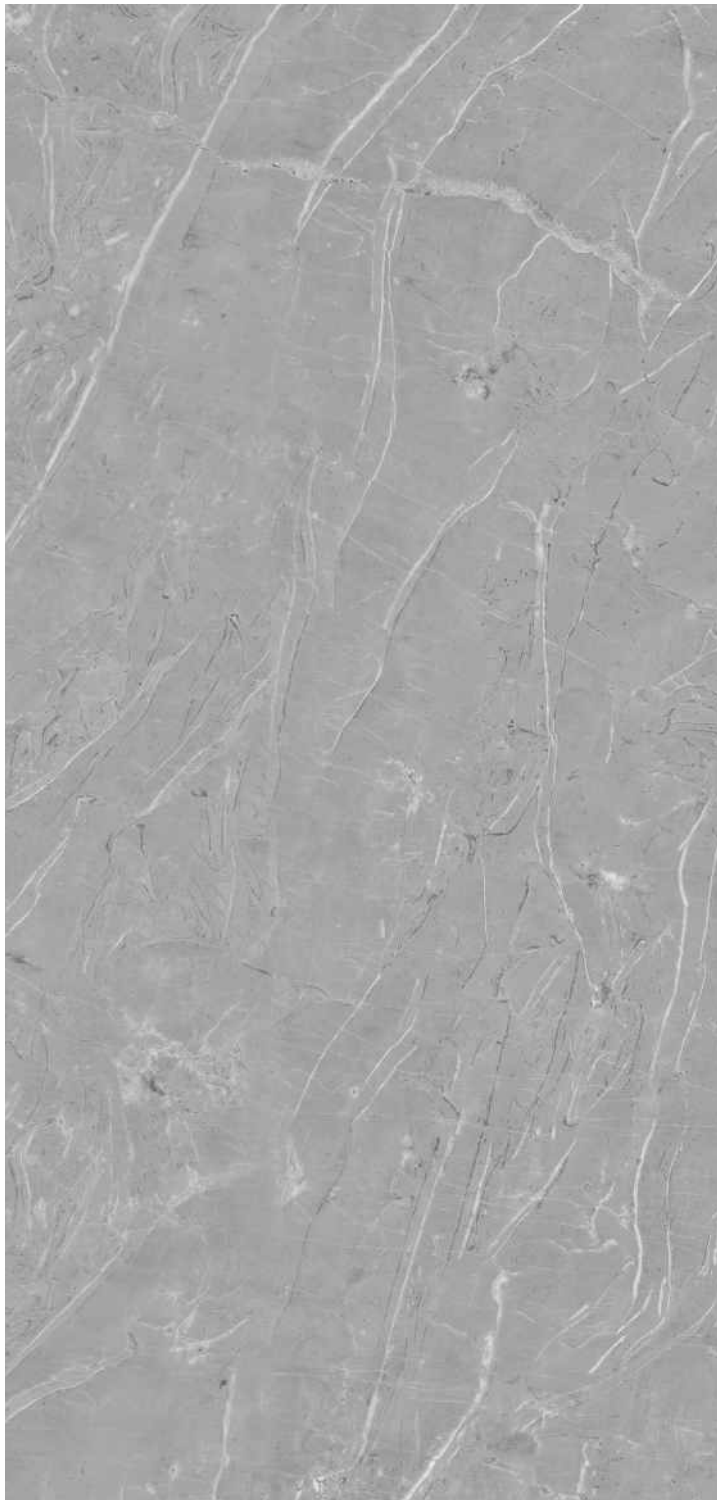

4528


1.5mm Thickness ( $\pm 10\%$ )



4532

1.5mm Thickness ( $\pm 10\%$ )

4342



4315



## DIMENSIONS:

Size: 2440mm x 1220mm, T : 1mm | 1.4mm - 1.5mm | 2.4mm - 2.5mm | (+/-10%)

## GENERAL USE & CARE GUIDE

ACRO GLASS laminates are easy to maintain. With proper application and appropriate care, our laminates will last through the years.

- Cleaning should be done with water and clean, non-abrasive cloth.
- To remove more stubborn stain, use mild household glass cleansers like Colin. Gently wipe the surface with a non-abrasive cloth.
- Avoid the use of abrasive liquid cleansers, bleaching compounds or solution as these may damage the surface of the laminate.
- Do not place hot cookware directly on the laminate, Prolonged exposure to temperatures above 30 degree Celsius may cause damage to the laminate surface.
- Glossy surfaces are recommended only for vertical application.
- Do not use thinner on the surface of the ACRO GLASS laminate.
- Recommended to store the laminates at temperature below 30° Celsius.

## INSTALLATION TIPS:

- Stir the LUXEBOND adhesive before using it, and do not mix water in adhesive.
- Clean the dust particles from the surface of the base substrate (Plywood, MDF, Particle Board) by cloth, soft brush, sponge or sand paper.
- Spread the adhesive uniformly by brush, roller or adhesive spreader on both ACRO GLASS laminate and base substrate (Plywood, MDF, Particle Board).
- Leave at least 2mm of groove between two pieces of ACRO GLASS laminate so that at the time of pressing it will be easy to remove air from between the ACRO GLASS laminate and base substrate (Plywood, MDF, Particle Board).
- Use soft pinch roller or normal pressing technique at the time of pressing ACRO GLASS laminate on the base substrate (Plywood, MDF, Particle Board).
- The pressing should be done from the middle of the panel and move towards the side line and corners of the panel.
- Make sure to give sufficient amount of pressing to ACRO GLASS Laminate for almost 12 to 15 hours to achieve full bonding strength.

## TO AVOID YELLOW PATCHES AND COLOUR FADE PROBLEM:

The reason behind yellowing/colour fade problem areas follows:

- When laminate is exposed to direct sunlight, it may cause discolouring, fading and yellowing of the laminate.
- Use of inferior quality of Dipped plywood/Dipped lipping Patti can react with adhesive which may cause yellow patches after the installation.
- Using of synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) may lead to brown / coloured patches on acrylic laminates. We recommend using LUXEBOND adhesive.
- Prolonged exposure to temperature above 30 degree Celsius
- Placing hot cookware directly on the Acrylic laminates may cause patches on the surface.

## IMPORTANT INFORMATION: TO AVOID AIR BUBBLES:

Reasons leading to air bubble problems are as follows:

- Bonding of Acrylic laminate under high humidity environment.
- Using of incorrect adhesive type may also lead to air bubble after the installation. We recommend using LUXEBOND adhesive.
- Due to uncertain weather conditions, base substrate (Plywood MDF, Particle Board) may absorb moisture. After few days of installation, base substrate gradually loses moisture resulting in air bubble formation between acrylic laminate and substrate.
- Using uneven surface substrate (Plywood MDF, Particle Board) may lead to air vacuum and air bubble may appear after the installation.
- When more then 8'X2' of Acrylic laminate is used for panelling, it may lead to air bubble formation after installation.
- Lack of bonding/pressing time during the installation of Acrylic laminate may lead to air bubbles.
- ACRO GLASS sheets should be kept evenly straight. If the sheets are in roll form, it should be kept straight for minimum 48 hours and then you can press and laminate the surface for better results.

## LIMITED WARRANTY

Euro Pratik Products are reasonably Free of defects and when properly handled and fabricated will comply within reasonable deviations to applicable manufacturing specifications. Clients are advised to inspect products thoroughly prior to installation. Euro Pratik warranty will not cover defects and non compliance from and or otherwise attributable to any other causes, including without limitation:

- Improper handling/transportation/storage of the products
- Improper installation of the products
- Improper and unintended usage of the products
- Lack of or improper maintenance of the products
- Exposure of the products to extreme temperatures
- Unauthorized alteration to the products
- Outdoor Applications
- NO GUARANTEE AND NO EXCHANGE IN ANY CIRCUMSTANCES.
- THERE CAN BE COLOUR VARIATION IN MATERIALS FROM DIFFERENT BATCHES.
- IT IS ADVISED TO USE SAME BATCH MATERIAL TO AVOID COLOUR VARIATIONS.
- ACTUAL COLOURS OF THE SHEET MAY VARY FROM THIS BROCHURE.
- ABRO TAPE USE NOT RECOMMENDED.


## Installation Video



Luxebond Adhesive-  
The perfect partner for  
your Acro Glass surfaces

# Marbo Series

Size : 2440mm x 1220mm Thickness (±10%)



03

24550 2.5mm(T)  
4550 1.5mm(T)



05

24551 2.5mm(T)  
4551 1.5mm(T)



07

24527 2.5mm(T)  
4527 1.5mm(T)



09

24531 2.5mm(T)  
4531 1.5mm(T)



11

4552 1.5mm(T)



13

4553 1.5mm(T)



15

4554 1.5mm(T)




17

4555 1.5mm(T)



19

4556 1.5mm(T)



21

4557 1.5mm(T)



23

4558 1.5mm(T)



25

4559 1.5mm(T)



26

4548 1.5mm(T)



27

4549 1.5mm(T)



28

4529 1.5mm(T)



29

4530 1.5mm(T)



30

4525 1.5mm(T)



30

4526 1.5mm(T)



31

4528 1.5mm(T)



31


4532 1.5mm(T)

## SOLID COLOURS




25

4311 1.5mm(T)



03  
29

4312 1.5mm(T)



07  
21

4313 1.5mm(T)



19

4314 1.5mm(T)



03  
15

4315 1.5mm(T)



15

4316 1.5mm(T)




17

4317 1.5mm(T)



11  
28

4319 1.5mm(T)



19

4322 1.5mm(T)



30

4323 1.5mm(T)



05  
30

4324 1.5mm(T)



26

4326 1.5mm(T)



07  
15

4327 1.5mm(T)



03  
13  
23

4328 1.5mm(T)



25

4329 1.5mm(T)



21  
27

4330 1.5mm(T)




26

4331 1.5mm(T)




29

4332 1.5mm(T)



09  
23  
28

4334 1.5mm(T)



13  
27

4336 1.5mm(T)




03

4338 1.5mm(T)



17

4341 1.5mm(T)



03  
31

4342 1.5mm(T)



05

4435 1.5mm(T)

# Stay Classy ACR̄O GLASS



Recommended Euro Pratik  
Special Purpose Adhesive



Euro Pratik products adds natural beauty to your interiors. Color Variance, Slubs, Weave irregularities and Shading that appears in these panels are to enhance natural beauty and are not imperfections. Utmost care has been taken to give accurate description & technical specification. Errors and omissions, if any please excuse. Technical specifications and product are subject to change without prior intimation. Use same batch material to avoid color variation. EURO PRATIK warrants that all products are free from manufacturing defects and perfectly fit for use in normal conditions. No Guarantee/Warranty of the Product after installation. (Dimension Tolerance +/- 5-10%)